
## Porta John®

Toll-Free Phone: 800-521-6310 Fax: 586-731-0670

International Phone: 586-739-4611

Web Page: www.HandWashStation.com E-Mail: info@toilets.com

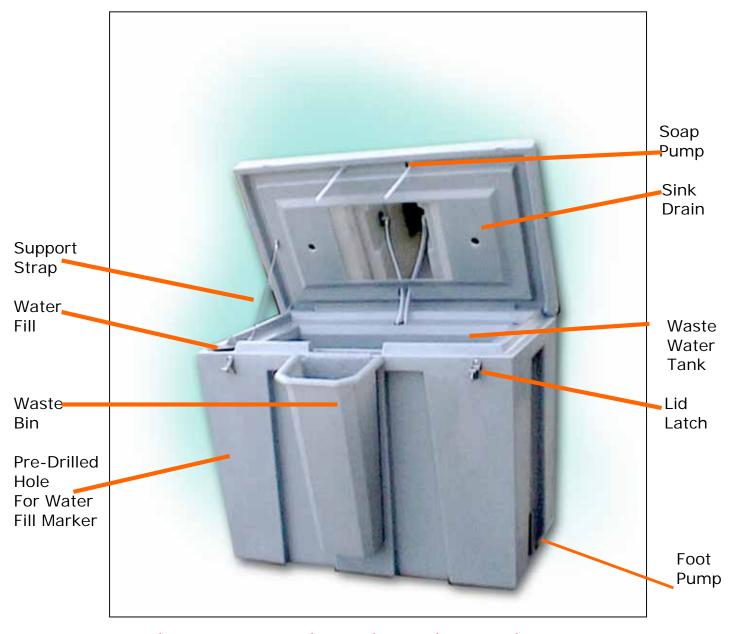

## Fresh Water Hand Wash With Social Distancing

#### **Model FPHW 4545**

Stainless Steel Latches Heavy Duty Foot Pumps Shipped Fully Assembled



#### **Model FPHW 4545** Made From High Density Polyethylene

Water Faucet **Activated With Foot Pump** 

**Note: Pre-Drilled Hole For Fresh Water Fill Marker** 



Hand Soap Reservoir

Waste Basket



Bi-fold Towel Holder Two Packages Of Paper Towels



Hand Soap Pump

Hand Wash Faucet

45 Gallons of Fresh Water and 45 Gallons of **Grey Water Capacity** 

Toilets.com, Inc. featuring Porta John® Brand Products Ph. 800-521-6310 (US) 2 Ph. 1-586-739-4611 (Int'l) E-Mail: info@toilets.com Web Page: www.toilets.com

# Porta John®

Toll-Free Phone: 800-521-6310 Fax: 586-731-0670

International Phone: 586-739-4611

Web Page: www.HandWashStation.com E-Mail: info@toilets.com



#### **Model FPHW 4545**

The dimensions of the dual sink unit are:

48" x 24" x 48" (30 inch sink Level)

Weight is 104 pounds

Fresh Water Capacity: 45 Gallons (US)

Waste Water Reservoir: 45 Gallons (US)

**Note: Pre-Drilled Hole For Water Fill Marker** 

Our two-person hand wash stations have a 90 gallon capacity, contain dual sinks, towel holders and soap dispensers and are equipped with a waste basket.

These sinks can be placed side to side for an unlimited number of dual hand wash stations.



Model FPHW 4545

# Porta John®

Toll-Free Phone: 800-521-6310 Fax: 586-731-0670

International Phone: 586-739-4611

Web Page: www.HandWashStation.com E-Mail: info@toilets.com

# DUAL HAND WASH STATION Model FPHW4545 USE & MAINTENANCE INSTRUCTIONS

Tools Needed: NONE

- 1. Prior to use, fill fresh water reservoir with 1 2 gallons of water. Gently rock Hand wash Station back and forth to flush out any scrap material.
- 2. Tip the unit up, lie on end and drain water through the water fill hole. You are now ready to fill the Hand Wash Station with fresh water.
- 3. Open top and place waste container over front lip of unit.
- 4. Insert any type of liquid soap into soap reservoir by lifting top and filling the reservoir.
- 5. Place 45 gallons of water in the sink through the water fill hole. DO NOT OVERFILL. The overflow mark and factory-drilled hole is located on the outside corner below the fill hole.
- 6. Insert paper towels into towel holder by lifting the towel holder lid. Insert towels and pull the first towel out to get it started. Single, double, C-fold, or bi-fold towels may be used.
- 7. General Maintenance for Hose & Foot Pump:
  - a. After each use, flush out the system with 1 oz. bleach to 3 gallons of water to prevent calcium or lime build-up. Pump the foot pump until you smell bleach and then store unit away. Before next use, flush out with fresh water.
  - b. If storing in freezing conditions, empty all water and add 1 gallon of RV antifreeze. Pump both foot pumps until antifreeze comes out the faucets. Flush system with fresh water before next use.

### Fresh Water Hand Wash With Social Distancing